

Why seams are sometimes needed

If you're ordering a clear PVC screen (Flexi 30 or Ultra 50), seams may be required depending on the overall size and orientation of the panel.



Our clear PVC is supplied in fixed roll widths: 1.3m for Flexi 30 and 1.8m for Ultra 50. If either dimension of your screen cannot be accommodated within the roll width once the material is optimally orientated, the panel will need to be heat-welded, which can result in a visible seam.

Example

An Ultra 50 screen measuring 3m wide × 1.8m high can be produced without a seam, as the material can be rotated to suit the roll width. A screen measuring 3m wide × 2.0m high, however, cannot be produced without joining the material and will require a seam. In this case, we would typically place the seam horizontally in the lower third of the panel (around 200mm from the bottom edge).

Where seams are required, they are positioned as discreetly as possible, usually out of eye line. In some cases, seams can be further minimised by placing them above zip splits or aligning them vertically with structural posts.

All seams are clearly shown on your pre-production designs that require your approval before manufacture.

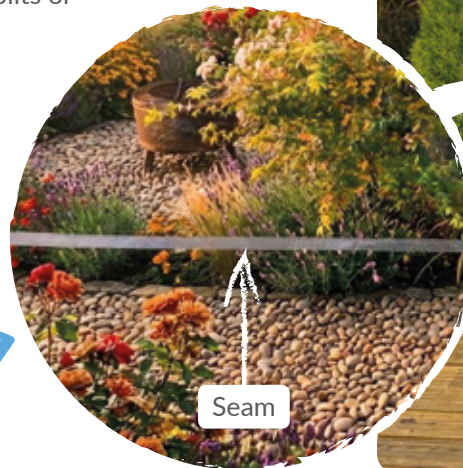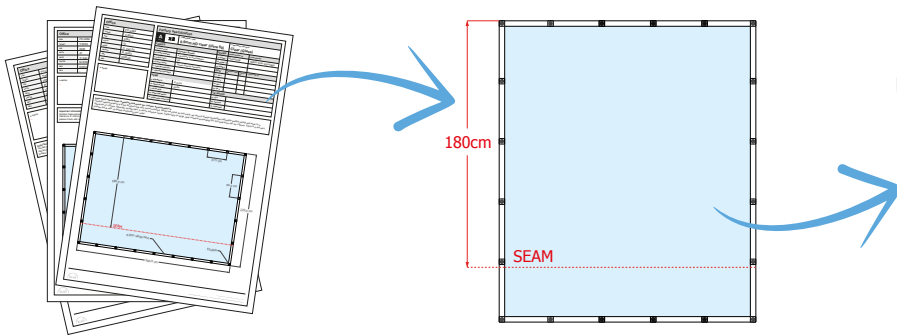

Revision 05 Jan 26